

5225 High bright 2-in-1 Hybrid LED strip

SC-YID3-W+WW-12

Features:

1. 5225 assembled LED
2. 12V DC, 28.8W/M max
3. 60LED/M, min cut 50mm
4. 6000+3000K
5. IP20
6. Max length: 5m
7. Note: work with aluminum heat sink.
8. CE, ROHS, 3 years warranty



Application:

Advertising billboard, backlit decoration, architecture, bar, dance hall, wine cabinet, floor, ceiling, etc.




Technical parameters :

Model	Width (mm)	Max.Length (m)	Min.Length (mm)	LED Type	LED Qty. (pcs/m)	DC Voltage (V)	Max. Power (w/m)	Luminous Flux (lm/m)	Color
SC-YID3-W+WW-12	10	5	50	5225	60	12	28.8	1289	W
								1366	WW



Dimension (Unit:mm):

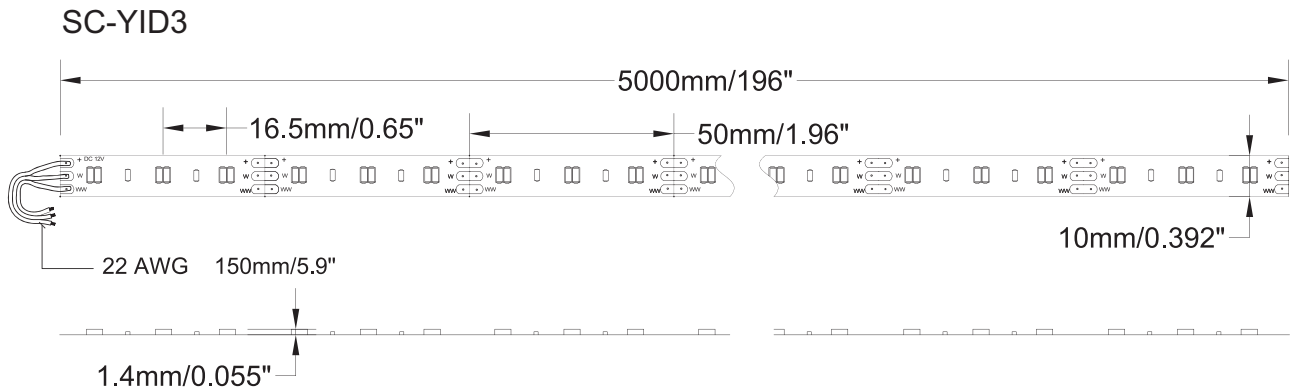

Installation requirement:

1. Installed on flame-retardant surface, wood and material exceed 2mm thickness
2. Please first read the product specification carefully, make sure the using environment conform to specification, then it can be used
3. Confirm input voltage and power off before use
4. Series conneciton can't exceed 3m, and the strip must be used with aluminum profile and other radiators
5. Cut the strip according logo on the strip

2015-08-11