







# ***SMD SMOOTH*** *LINE STRIP*



## Smooth seamless linear glow

High-Density 1510 LEDs for Smooth, Even Glow. Better lighting consistency, dot-free.



## CRI90

Vivid, true-to-life colors for premium lighting effects.

## Min.Length: 40mm

Customize your length with easy cutting, perfect for any installation scenario.

## Smooth line strip

No solder joints on PCB board,  
Appearance looks more elegant and clean

## Flexible Bending for Curves


Bending radius  $\geq 30\text{mm}$ ,  
easily fits curved surfaces and corners





## IP67 Waterproof

Heat-resistant, UV-resistant, and IP67 waterproof for versatile indoor and outdoor use.

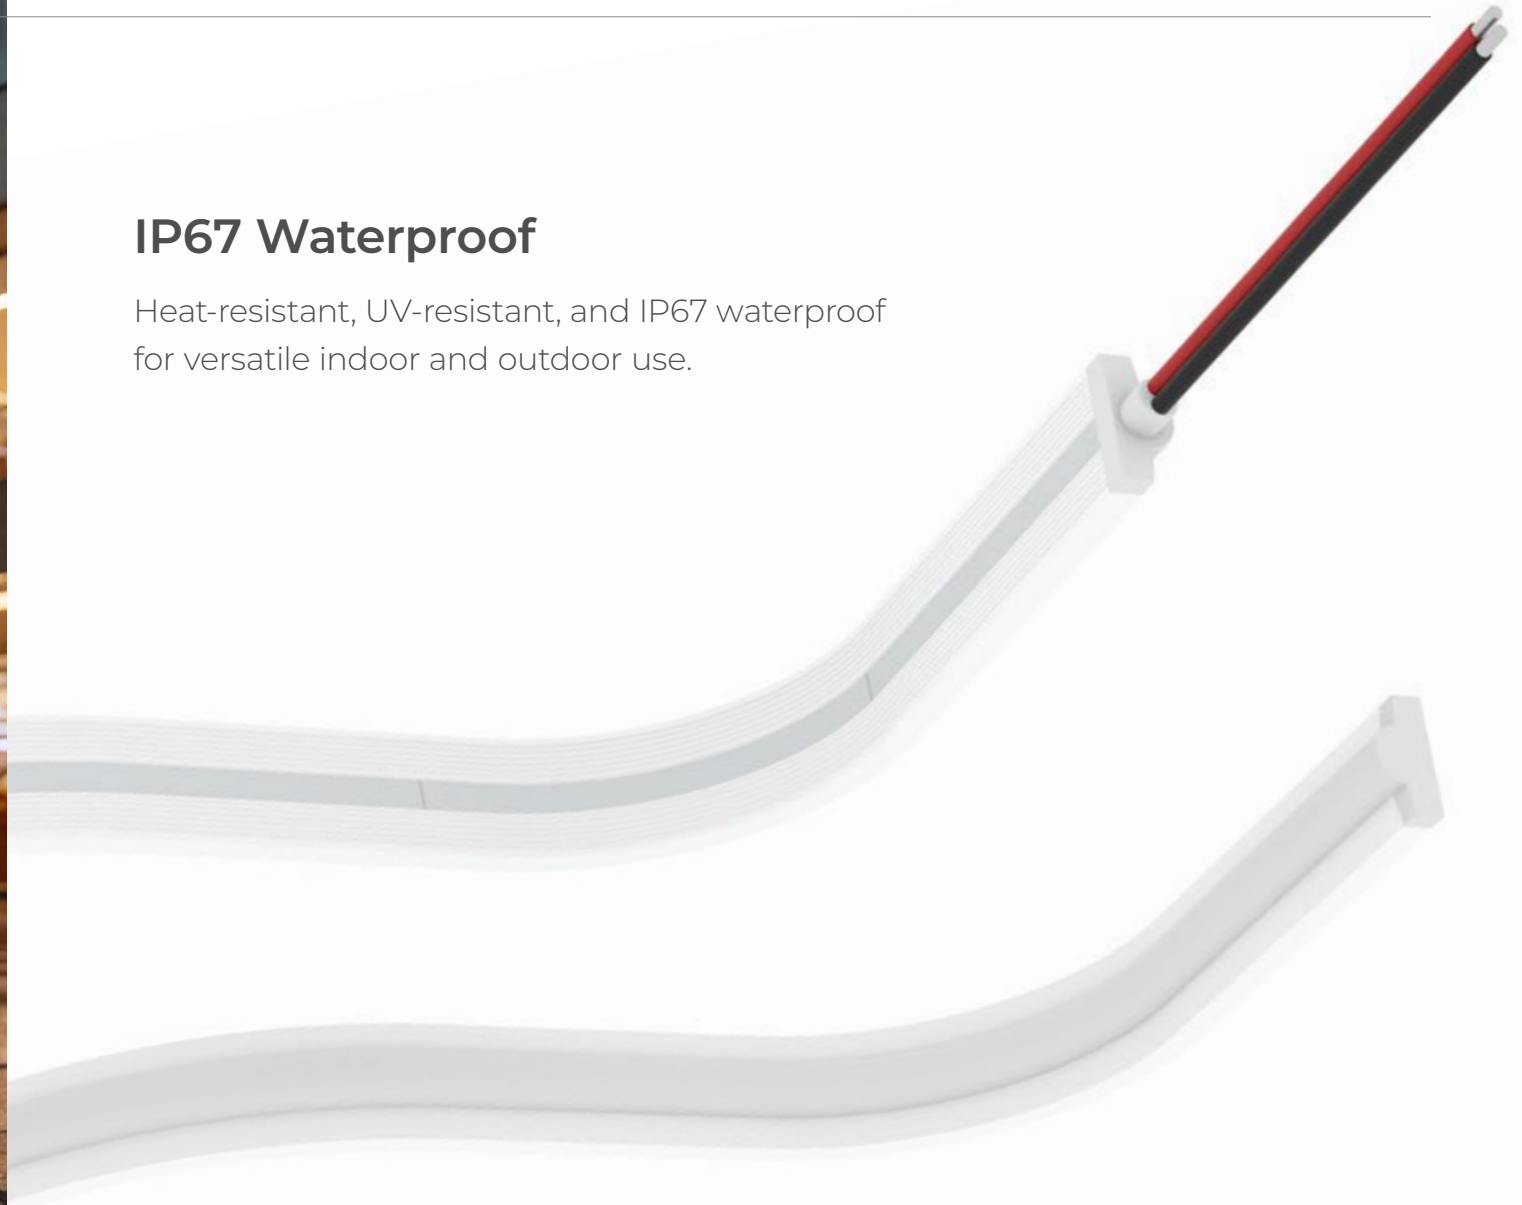



## APPLICATION


Widely used in hotels, shopping malls, furniture, cabinets, shelf, as decoration lighting, direct lighting or indirect lighting.

## SPECIFICATIONS


Model	Wave Length & CCT Range(for LED only)		Luminous Flux (lm/m)	CRI	LED Type	LED Qty (LEDs/m)	Rated Watt (w/m)	DC Voltage (V)	Max.Length (M)	Min.Length (mm)	PCB Width (mm)	IP Grade	Beam Angle
SC-1510-08-JT1005-XX-24-320-8-IP67	WW		1000	90	1510	320	9	24	5	40	8	IP67	130°
	NW		1020										
	W		1030										
	R	620-630nm	/	/									
	G	515-530nm	/										
	B	460-470nm	/										

## DIMENSIONS

(Unit: mm/inch)

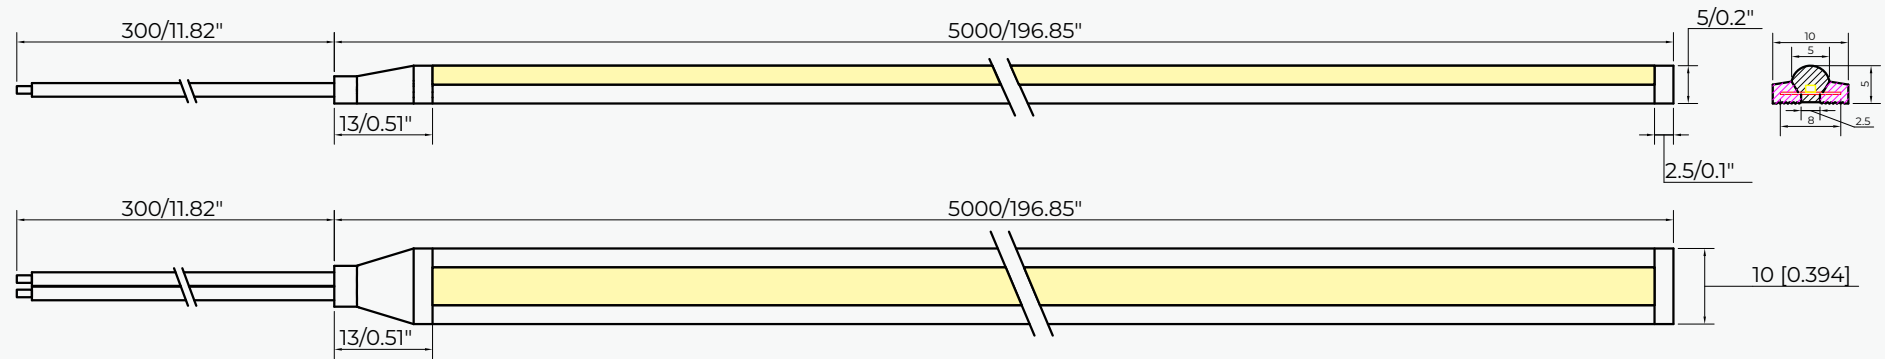


## PACKAGING INFORMATION

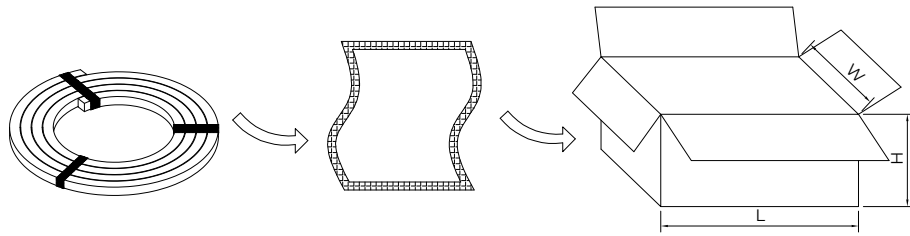


LED strip + Anti-static bag		Packing Box		
Part Number	Gross Weight per Reel	QTY per Carton	Gross Weight	Size(cm/inch)
SC-1510-08-JT1005W-XX-24-320-8-IP67	0.35KG	60	22KG	59cm*32.5cm*21.1cm 23.23"*12.8"*8.31"

## BENDING DIRECTION

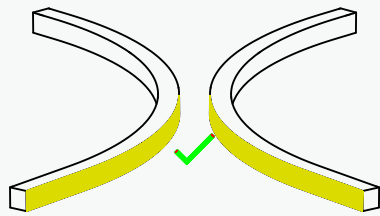


Correct Bending

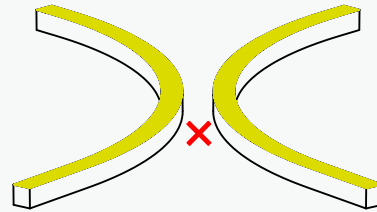

Incorrect Bending



Incorrect Twisting

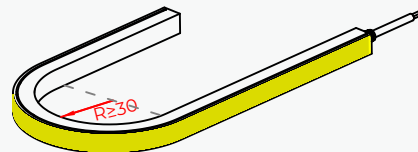

Minimum bending radius

## INSTALLATION REQUIREMENT



- The LED strip and accessories can't be squeezed or folded.
- PCB conductive parts can't be damaged during installation.
- Installation must conform to electrical safety standard. The LED strip can only be installed by professionals.
- Ensure power supply transform operating load with transformer.
- When installing on metal or conductor surface, insulation protection need to be provided to the contact area.
- Observe positive and negative polarity, ensure correct connection to avoid damaging LED strip.
- During installation, please prevent static electricity.
- The product need anti-corrosion environment.