




DL301-4PL series  
**Polarized Wall Grazing**  
Recessed Downlight





## Description

This lamp achieves uniform distribution of light spots on the wall and even brightness across the entire wall with a clear skyline through the reasonable combination of optical lenses and polarizing films, which precisely allocates the light.

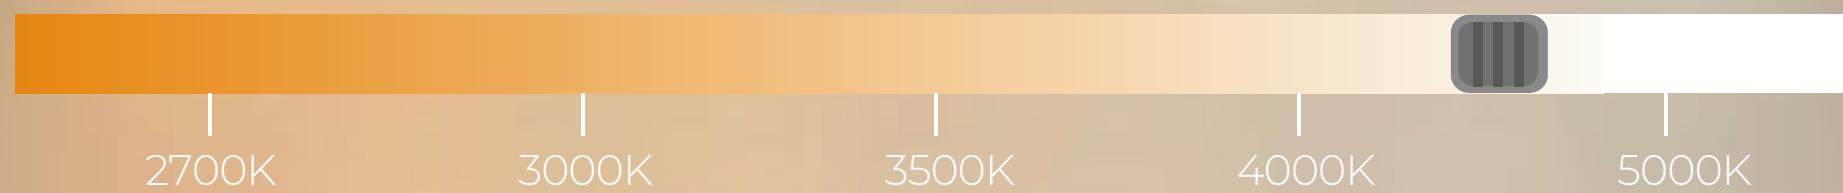

## Color temperature stepless adjustment

2700K (warm light) to 5000K (natural light), freely adjustable to meet different ambient lighting needs;



## Precise light control, master wall wash


- Adopts exclusive polarized lens technology to say goodbye to cluttered light spots, achieve a uniform light curtain from the top of the wall to the foot of the wall, and light up the sense of luxury in the space.
- Creates a clean, crisp light-dark line at the ceiling junction, boosting depth and style in one step.






## Adjustable beam angle


- With a swing adjustment angle of 0° to 15°, users can fine-tune it according to the installation position and the desired wall wash width, adapting to different scene needs and high flexibility.

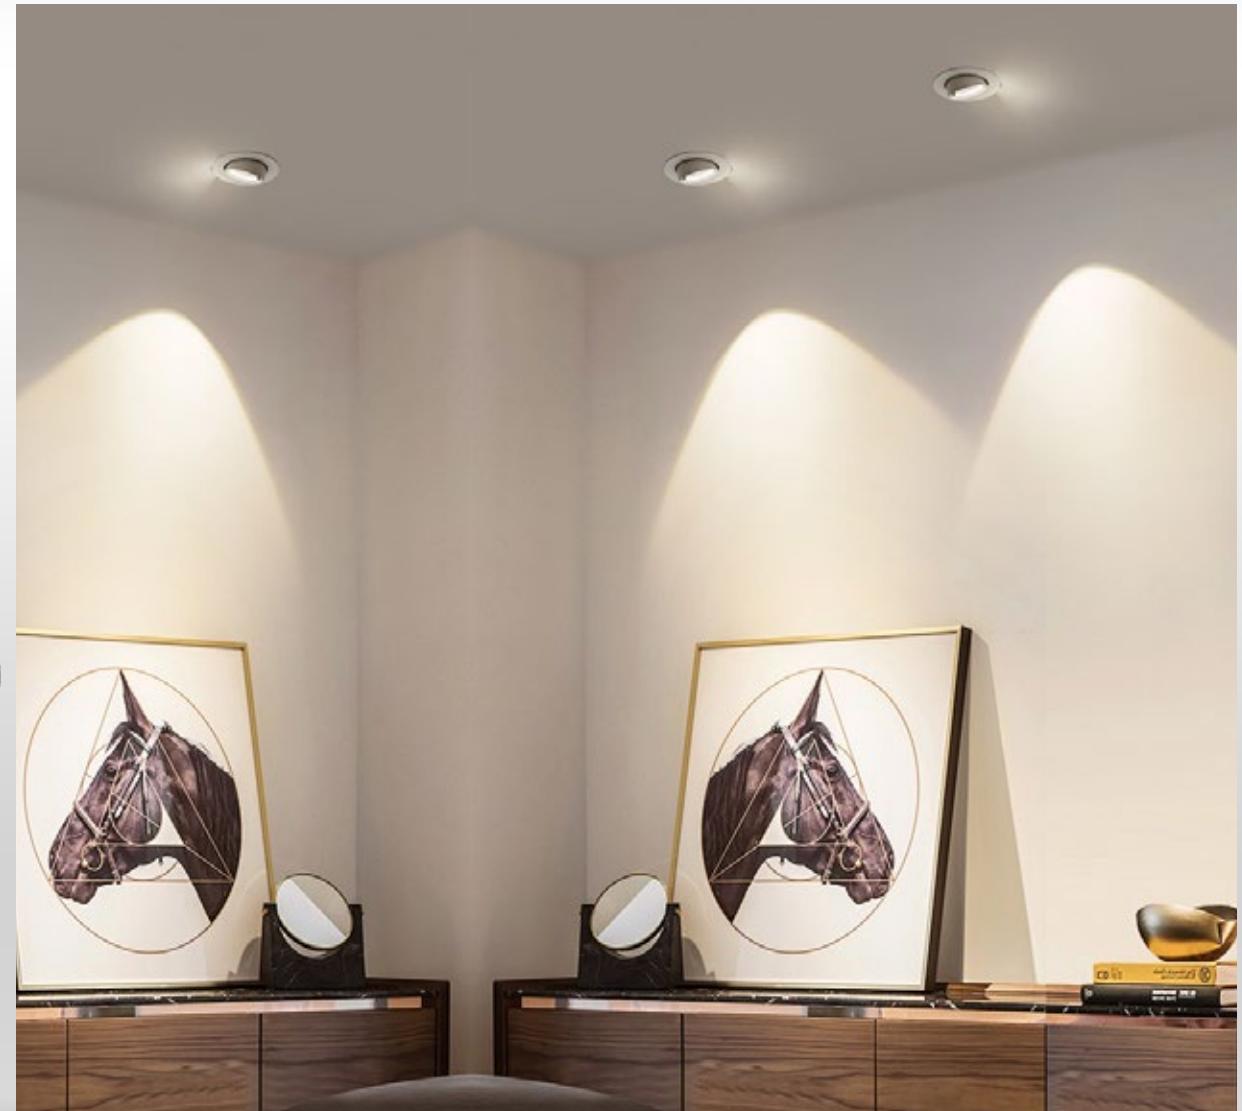

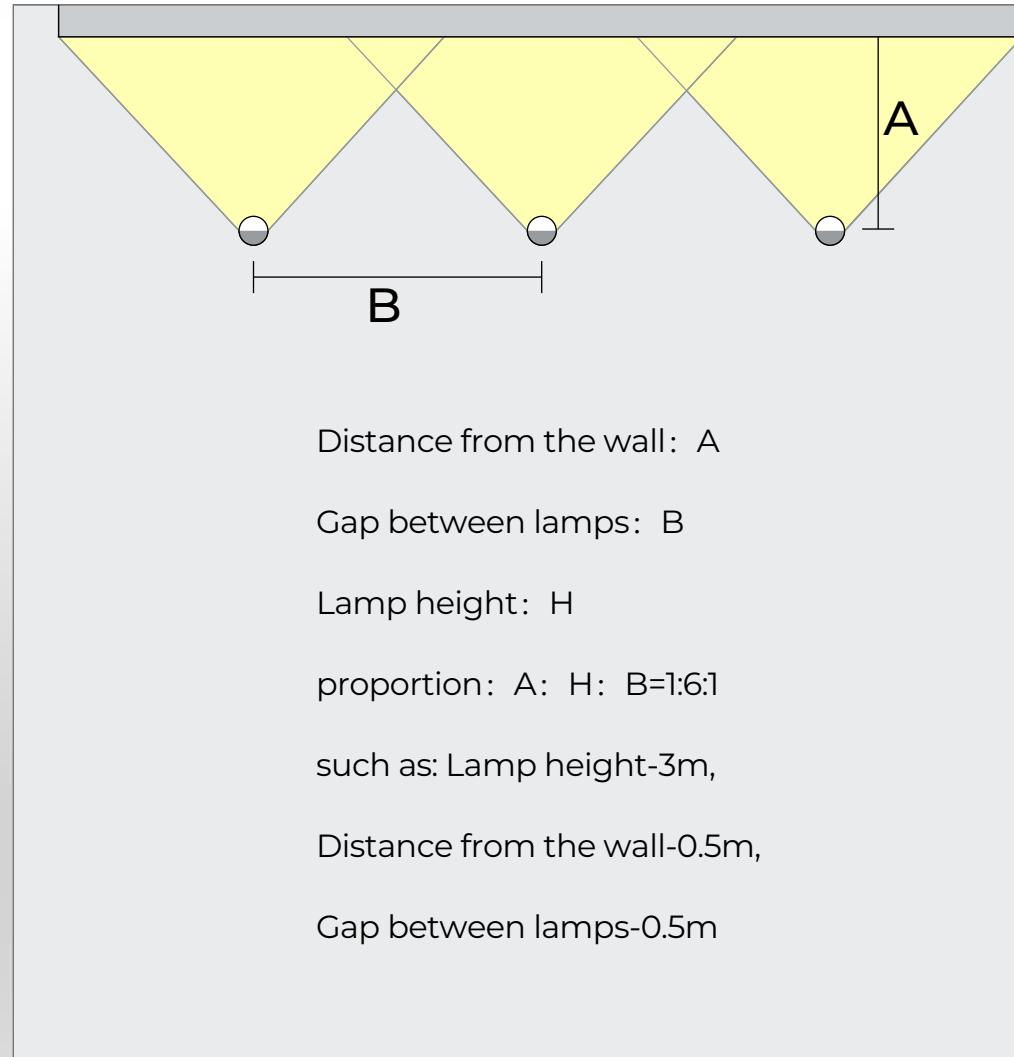

## Luminaire arrangement


- This "polarized wash wall downlight" is the highlight of a main-light-free design. With precise optics, it solves the uneven wall washing common with traditional downlights, offering a professional lighting solution for high-end spaces.

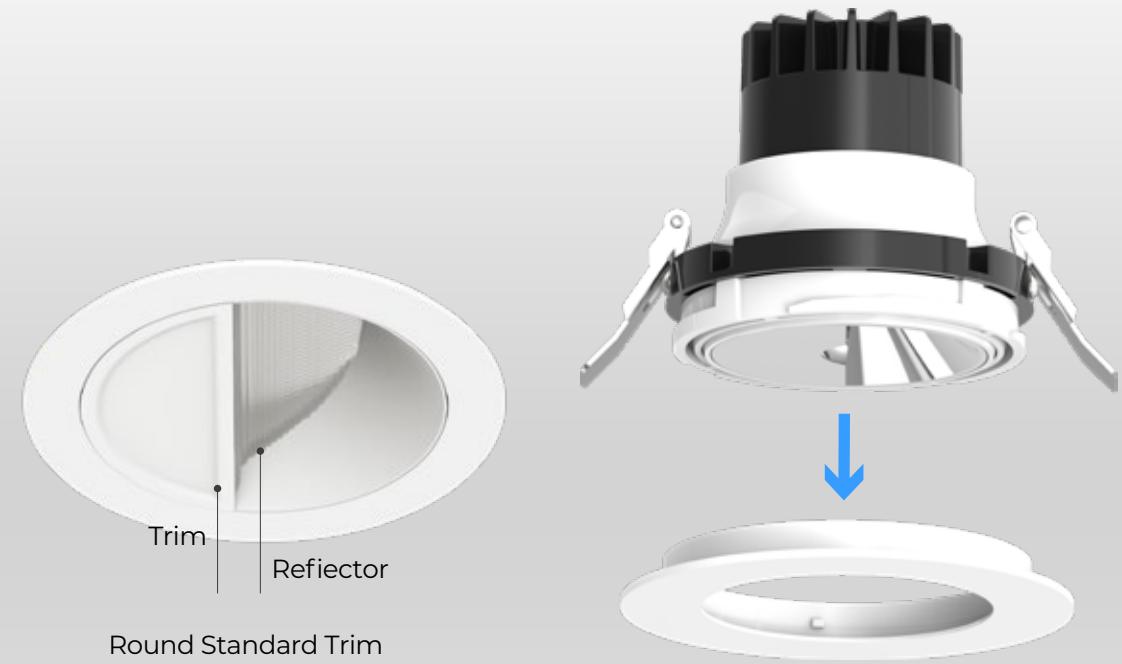


## Parameters

Model	CCT	Luminous flux (lm $\pm$ 10%)	LEDs type	CRI	PF	Power	Voltage	Work Temperature
DL301-4PL-12W-5CCT	2700K	515	Double Color COB1510	Ra>90	>0.9	12W	AC120V, 50/60Hz	-20°C~40°C
	3000K	550						
	3500K	580						
	4000K	600						
	5000K	605						

## Dimensions

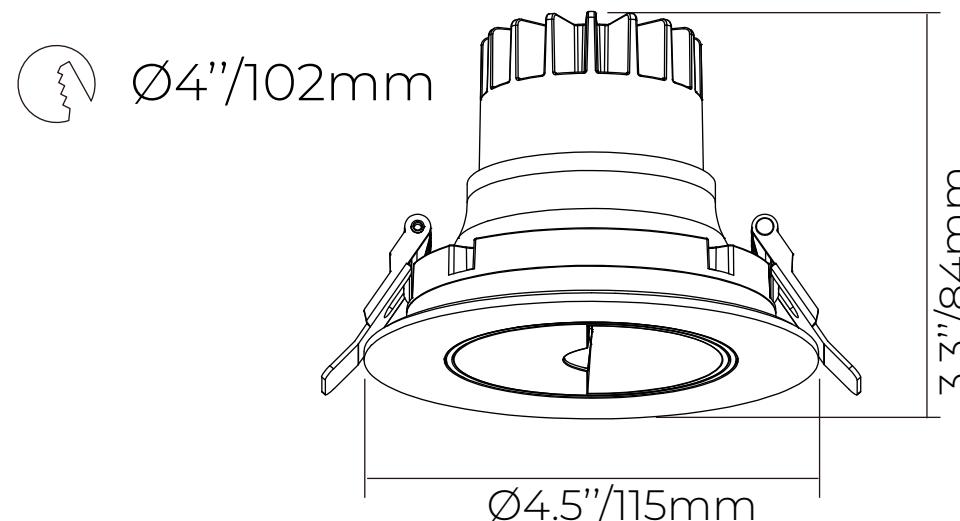

# Installation diagram

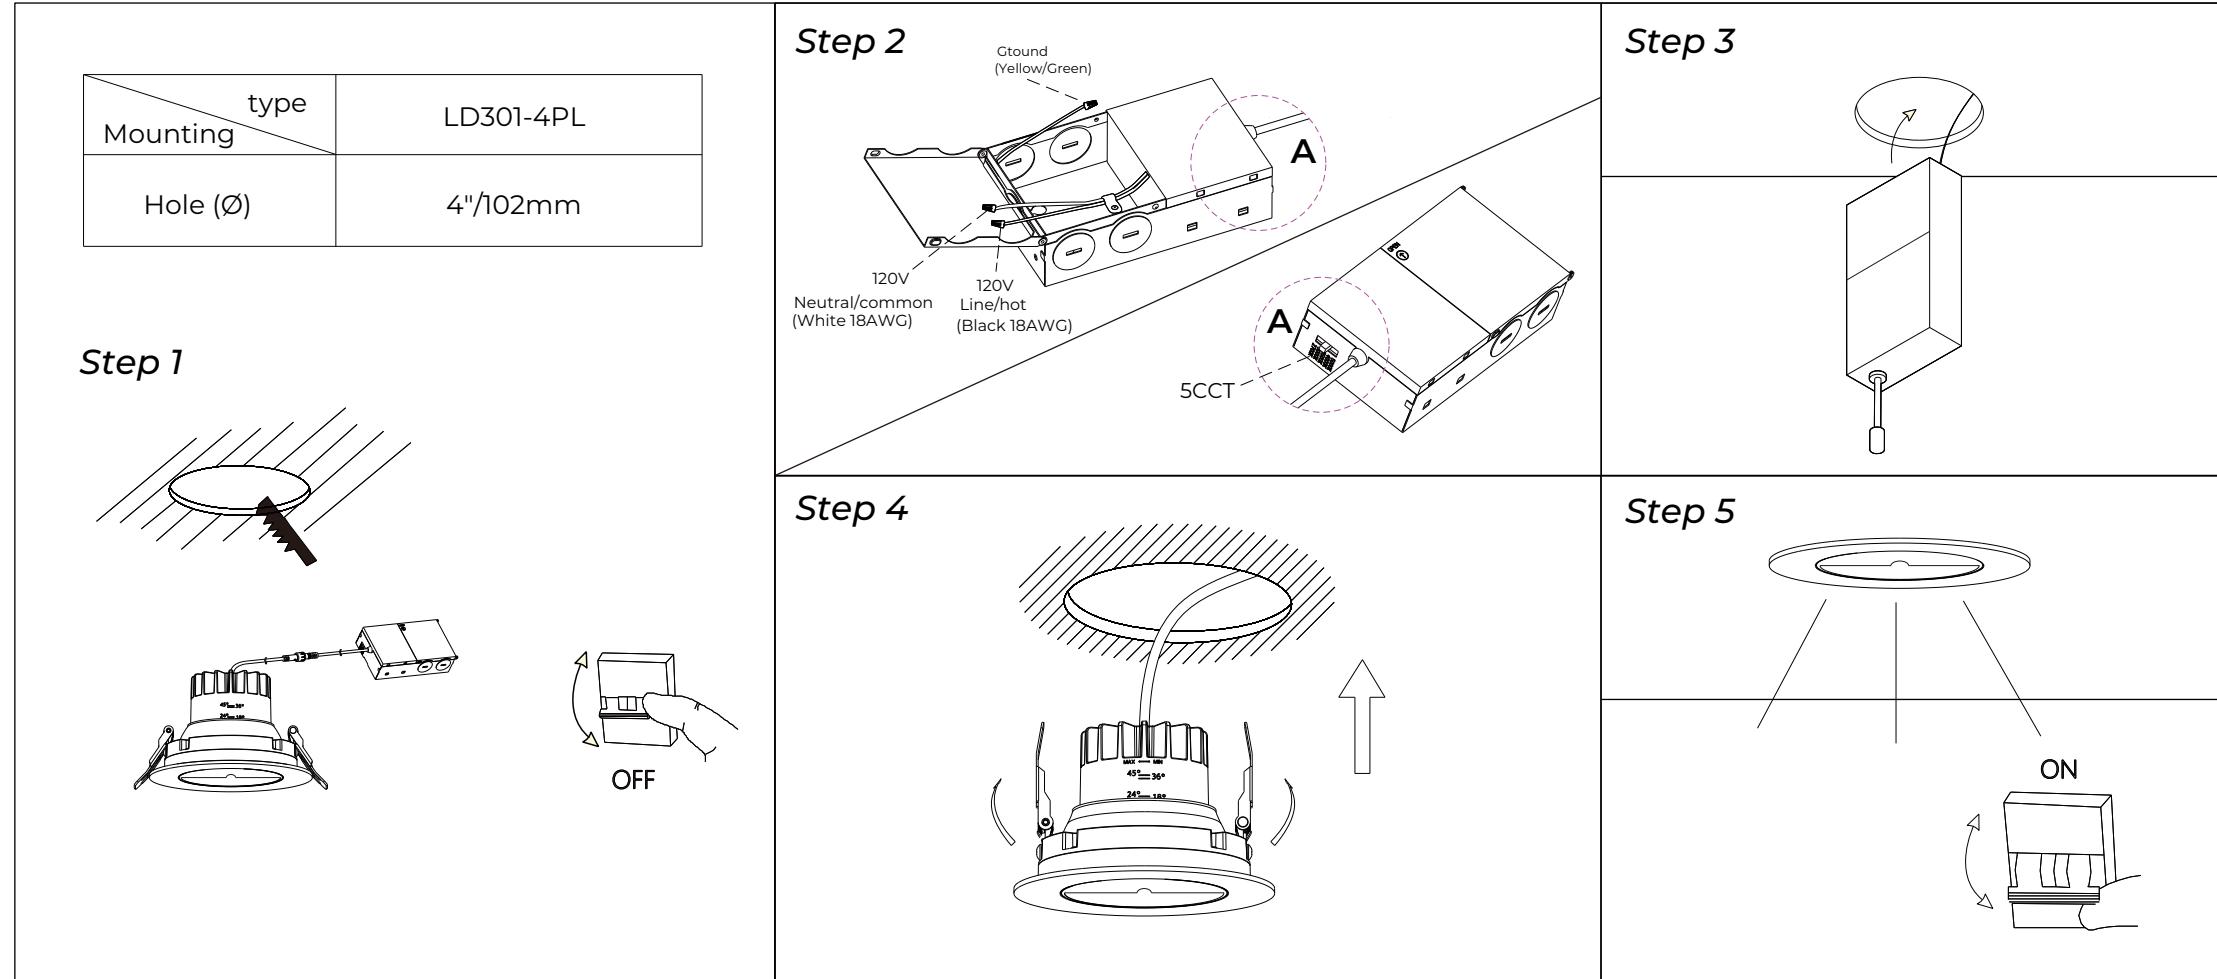

## Package

Model	Inner Box/Size	Carton/Size	N.W/Carton	G.W/Carton	Qty/Inner Box	Qty/Carton
DL301-4PL-12W	160*160*128mm	510*510*415mm	0.6KG	20KG	1PCS	27PCS

## Notice

- Please read the specification first, to make sure the service environment matches the condition in the specification before using.
- Please confirm the applicable power supply before using.
- Make sure the switch of product is off before connect to the power supply to prevent electric shock.
- Operation against rules may damage your property even harm to your personal safety.
- Dangerous high voltage, Non-professionals are not allowed to maintain the products.
- If the exterior flexible cable or wire is damaged, it must be exchanged by the supplier, its agent or other similar qualified personnel to avoid dangers.

