



SC-EP3528 LED Strip

SC-EP3528-X-12/24

SC-EP3528-X-95-12/24



5pcs/reel



Features:

1. 3528 assembled LEDs
2. CRI90/ CRI95
3. Can be cut short, to meet different length requirement
4. CE,RoHS,3 years warranty
5. Waterproof grade:IP20
6. Customized packing

Technical parameters :


Model	Colour	Lumen	LED Type	LED Qty. (leds/m)	Beam angle (degree)	DC Voltage (V)	Rated Watt (w/m)	CRI
SC-EP3528-X-12	W/WW/NW	454-511	3528	60	120	12	4.8	>90/95
SC-EP3528-X-95-12	W/WW/NW	403-434						
SC-EP3528-X-24	W/WW/NW	454-511	3528	60	120	24	4.8	>90/95
SC-EP3528-X-95-24	W/WW/NW	403-434						
SC-EP3528-X2-12	W/WW/NW	908-1022	3528	120	120	12	9.6	>90/95
SC-EP3528-X2-95-12	W/WW/NW	806-868						
SC-EP3528-X2-24	W/WW/NW	908-1022	3528	120	120	24	9.6	>90/95
SC-EP3528-X2-95-24	W/WW/NW	806-868						




Dimension & Circuit Drawings:

Unit:mm/inch


SC-EP3528-X-12

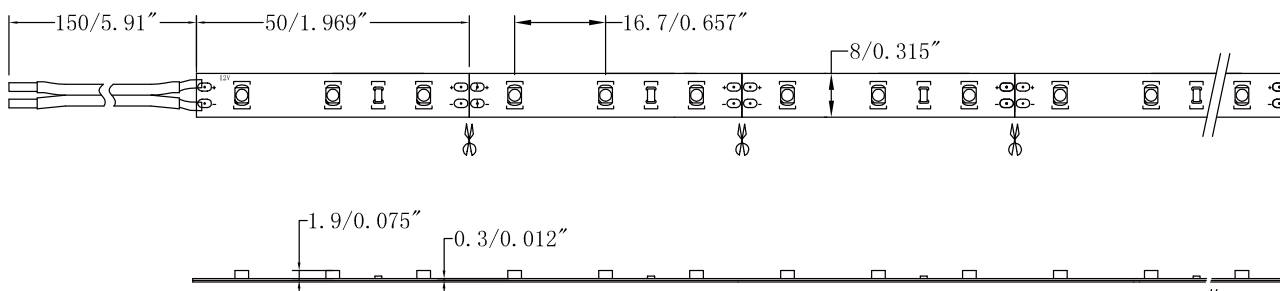


SC-EP3528-X-24

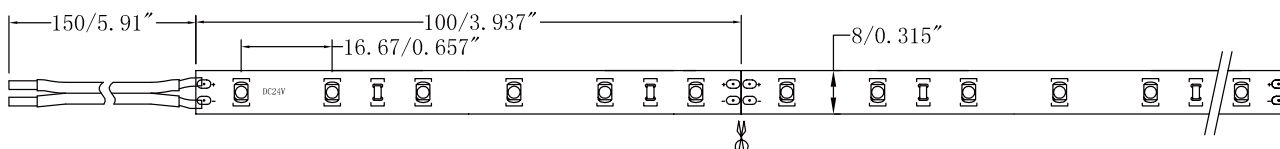

SC-EP3528-X2-12

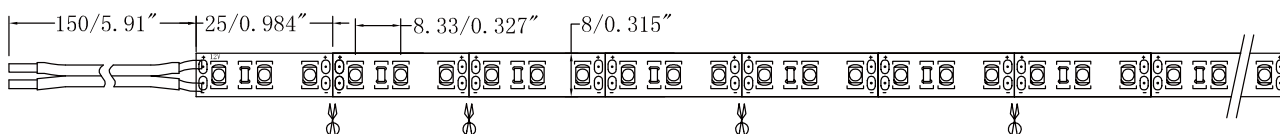


SC-EP3528-X2-24

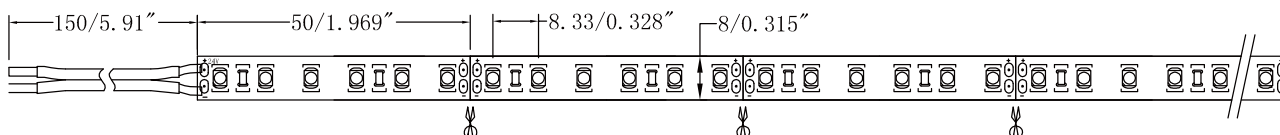





Connecting&Installation Diagram:

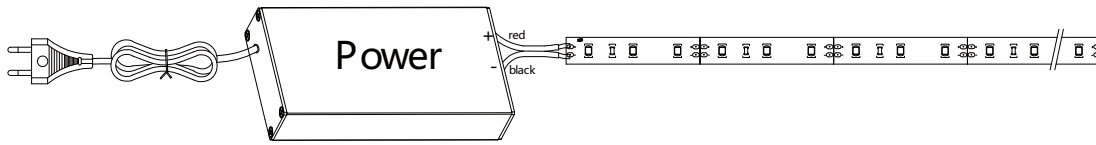

1. Connect red wire of strip to positive polarity of power supply, and connect black wire to negative polarity;

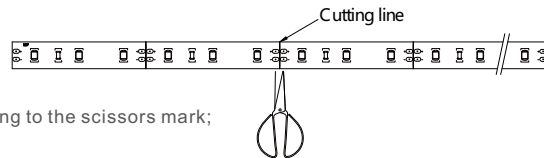


2. If don't need that long strip, it can be cut short according to the scissors mark;

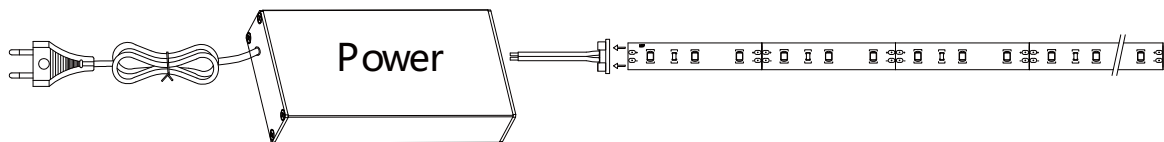

3. The cut strips can be connected via accessories connectors, then the strips are connected to power supply.

Packing instruction:

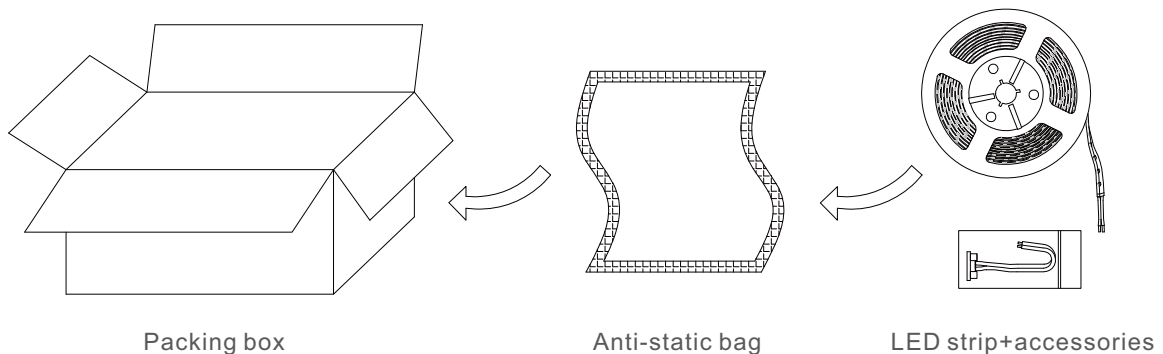

Installation requirement:

1. The LED strip and other accessories can be squeezed;
2. Transduction parts of PCB can't be damaged during installation;
3. Installation of LED strip must conform to electrical safety standards, and only professionals can perform installation;
4. Ensure power supply load employ transformer;
5. When the LED strip is intalled on metal or conductor surface, the contact surface must be processed with insulation;
6. Identify positive polarity and negative polarity before installation to avoid LED strip damage;
7. During installation, pay attention to preventing electrostatic;
8. The product need anti-corrosion environment, such as: avoid damp water drop or other adverse factor.

2017-5-4